

# Hughes 9450TW-C11 BGAN Mobile Satellite Terminal

## Compatible with both BGAN and BGAN M2M SIMs

Customers can now connect at IP broadband speeds of up to 464 kbps while on-the-move using the world's smallest mobile BGAN terminal—the Hughes 9450TW-C11. The Hughes 9450TW-C11 terminal is fully approved for operation on Inmarsat's Broadband Global Area Network (BGAN) satellite service and provides high-performance, on-the-move connectivity for the most demanding environments.

Powered by the smallest C11 antenna, the Hughes 9450TW-C11 is a budget-friendly and highly competitive mobile terminal, ideal for government, first responders, public safety, mobile healthcare, and remote mobile fleet personnel in industries such as utility, oil and gas, forestry, cable, and telecommunications.

Corporate disaster planners and remote field personnel can collaborate reliably and efficiently with various agencies and headquarters staff using video, voice, and data simultaneously. As with all Hughes BGAN models, the Hughes 9450TW-C11 includes a built-in wireless Wi-Fi (b/g/n) access point. The Hughes 9450TW-C11 terminal is IP-based and offers selectable, dedicated Quality of Service (QoS) levels.



Simple, quick, and flexible options are available for installation on any vehicle. The mini-antenna may be permanently mounted for fleet-style installation or the optional magnetic roof mount can be used for rapid installation and removal. The antenna includes a single RF cable.

The Hughes 9450TW-C11 terminal also has four (4) Ethernet ports with Power over Ethernet (PoE) that allow the user to connect multiple devices.



# Hughes 9450TW-C11 BGAN Mobile Satellite Terminal

## Features

- Fully autonomous tracking antenna acquires and tracks the BGAN satellite signal while on-the-move
- Simultaneous use of Ethernet and WLAN for IP data plus RJ-11
  - Four Power over Ethernet (PoE) ports
  - Built-in WLAN access point (b/g/n)
  - Two RJ-11 ports; one each for voice and fax
- Internal Web User Interface (UI) for configuration and control without the use of LaunchPad
- Smart-phone app to control terminal using Wi-Fi connection
- Auto context activation feature allows data connections to be activated without user action
- Multi-user capability (up to 11 simultaneous sessions)
- Basic NAT, NAPT and Relay Mode IP connection options

## Services

- Compatible with both BGAN and BGAN M2M SIMs
- Remote management support
- Asset tracking option available
- Up to 464 kbps shared data rate and 128 kbps streaming IP
  - Selectable Quality of Service (32 kbps, 64 kbps, 128 kbps)
- Circuit-switched services: speech (4 kbps), 3.1 kHz audio (64 kbps)\*

\*3.1kHz audio is network limited to look angles above 45 degrees.

## Package Includes

- Hughes 9450TW-C11 Mobile Satellite Terminal
- Tracking antenna, LMR195 or equivalent (<10 dB loss), TNC connector
- Installation Guide (see BGAN.Hughes.com for PDFs)



## Technical Specifications


### Transceiver

Weight:	2.2 Kg
Dimensions:	46 mm x 281 mm x 234 mm
Humidity:	95% RH at +40° C
Temperature:	-25° C to +55° C operating
Power: Idle:	32 W**
Max:	65 W** (when transmitting)
Input Voltage:	10.0 to 32.0 Vdc

\*\*Does not include power supplied to PoE devices

### Antenna

Weight:	2.0 Kg
Dimensions:	252 mm x 119 mm
Humidity:	95% RH at +40° C
Temperature:	-25° C to +55° C operating -40° C to +80° C survival
Wind:	125 mph (200 km/h)
Exception for Magnetic Mount:	100 mph (160 km/h)
Water and Dust:	IP56 antenna
Ice:	25 mm non-operational

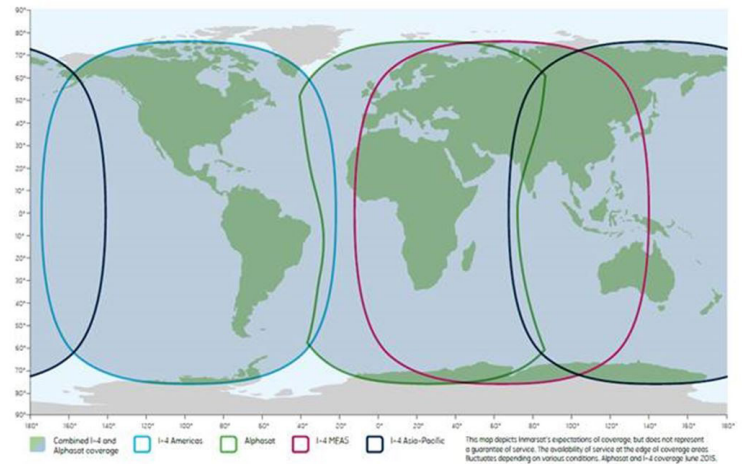

For additional information, please contact Hughes at 1-866-569-5153 or email [BGANsales@hughes.com](mailto:BGANsales@hughes.com).



[www.hughes.com](http://www.hughes.com)

11717 Exploration Lane  
Germantown, MD 20876 USA

©2019 Hughes Network Systems, LLC. HUGHES is a registered trademark of Hughes Network Systems, LLC. All information is subject to change. All rights reserved. H63201 AUG 19